

# The S300 HR

High Performance @ 300 mm Aperture

apre-inst.com

### Fizeau Interferometer for Flat Surface Measurement 4-Megapixel Imaging and 4 Optional Sources

## System Overview

**Output Diameter** 

Optical Centerline

Focus Range

Interferometer Size (L x W x H)

Weight

Measurement Techniques

Alignment System

Light Source

Laser Coherence Length

**Output Polarization** Camera Resolution

Shutter Speed (shortest)

Digitization

Computer & Software

Mounting Configurations

Accessories

304 mm (12 inch)

Specify

±2 meters

76 x 40 x 50 cm

TBD

Mechanical Phase Shifting or Vibration Insensitive Carrier Fringe

2-Spot with reticle with 2° Capture Range

Laser, Laser Diode, SCI and Wavelength Shifting

>100 meters

Linear or Circular

2044 x 2044

9 µs

8 bit

High-Performance PC, Windows 10 64-bit OS &

**REVEAL Software** 

Horizontal or Vertical or Adjustable

Vertical or Horizontal

### Performance

Image Resolution

Image Distortion

Fringe Resolution

Retrace Error<sup>3</sup> @ 200 fringes

RMS Simple Repeatability<sup>1</sup>

RMS Wavefront Repeatability<sup>2</sup> Measurable Part Reflectivity  $300 \, \mu m$ 

< 0.06%

>500 fr/aperture

 $< \lambda/15^{4}$ 

<0.6 nm RMS  $1\sigma$  – with NO averaging

< 0.6 nm RMS  $1\sigma$  – with NO averaging

0.5% to 100% Specify

### **Environment**

Temperature

15°C to 30C

 $\Delta T/\Delta t$ 

<1.0°C/15 min

Humidity

5 to 95% relative, non-condensing

Vibration Isolation

Isolation System recommended for PSI

### Vertical Mounted S300 HR

The S300 | HR can be mounted vertically or horizontally.

vertical configuration for measuring flat components or blocks of parts such as prisms or

RMS Simple Repeatability is defined as 2X the s tandard deviation of the RMS for 36 sequential measurements (0 averages ) of a short plano cavity

RMS Wavefront Repeatability is defined as the mean RMS difference between a synthetic reference (defined as the a verage of a II 36 sequential measurements ) and each measurement plus 2X the standard deviation Repeatability is defined as the PV residual error between a nulled measurement (the reference), subtracted from a measurement with 500 fringes of tilt, and expressed by the first 36 Zernike polynomials

<sup>&</sup>lt;sup>4</sup> λ/20 optionally available



# Data Acqusition & Analysis Software

# Traceable Measurement to Report <5 seconds

### Traceable Metrology


Saved profiles/process trees and report library assure analysis stability user to user, day to day. Data saved with all raw data, masks and filters...you know today and tomorrow how you got your results.

### Easy to Learn, Backward Compatible & 64 bit Stable

Internet browser like design is familiar and uncluttered and easy to learn and with .dat file formats you can save new data compatible with you database or analyze old data on REVEAL. With 64 bit Windows 10 operation large data sets are easily handled and your IT department will appreciate the W10 security.

#### A Complete Metrology Package - selected parameters

APPLICATIONS	FILTERS	ANALYSIS	RESULTS
V BASIC	✓ Masking ✓ Auto Aperture ✓ Reference Subtract ✓ Box ✓ Erosion (inside/out) ✓ Median ✓ Individual Zernike ✓ Spike ✓ Affine Transforms	✓ Acquisition Modes • Vibration Tolerant PSI • Wavelength Shifting • Vibration Insensitive ✓ Zernike ✓ 3D View ✓ PVr ✓ Islands ✓ ISO10110-14 ✓ Ogive	✓ ISO & Seidel  ✓ PV, RMS  ✓ PVr  ✓ Tilt  ✓ Power (Zernike)  ✓ Power (Deviation)  ✓ Astigmatism  ✓ Coma  ✓ SA3  ✓ 1D Profiles  ✓ Lengths

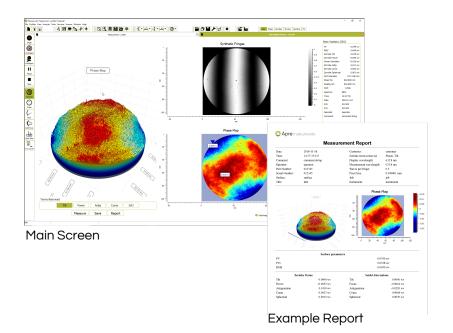

# What Users are Saying

"I found the analysis tree to be the most valuable feature of the REVEAL software. It gives the user visibility into the many layers of data processing that occur when making a measurement."

H. Balonek, Optikos

"REVEAL software is intuitive, easy to navigate and very capable in a myriad of applications, but the thing I appreciate most about it is the extensive, exceptionally organized, visually pleasing and effortlessly generated reports."

S. Iles, Edmund Optics

"[REVEAL] has a very user friendly interface and offers multiple ways to view the data. This makes analysis and qualification quick and easy.

A. Godina, Supply Chain Optics"



Instruments™

Apre Instruments Inc. 2440 West Ruthrauff Road Tucson, AZ 85705 520.639.8195 sales@apre-inst.com